

## Programmable AC Power Source

### MODEL 61700 SERIES

#### Key Features :

- Power: 1500VA, 3Ø (61701)  
3000VA, 3Ø (61702); 4500VA, 3Ø (61703)  
6000VA, 3Ø (61704); 12000VA, 3Ø (61705)  
Voltage: 0~150V/0~300V  
Frequency: 15~1.2KHz  
Phase angle: 0~360°
- Built-in PFC, provides input power factor over 0.98
- Advanced PWM technology delivers high power density in a compact rack-mountable package
- Built-in output isolation relays
- AC+DC output mode
- Programmable slew rate setting for changing voltage
- Turn on, turn off phase angle control
- User-definable power-on status
- Optional function for power line disturbance (PLD) simulation capability
- Comprehensive measurement capability: V, Irms, Ipk, I inrush, P, PF, CF of current etc.
- Programmable r.m.s. current limit
- Full protection: OP, OC, OV and OT protection
- Optional GPIB and RS-232C interface
- Easy-use software for operation



## PROGRAMMABLE AC POWER SOURCE MODEL 61700 SERIES

The Chroma Programmable AC source model 61700 series delivers pure, 5-wire, 3-phase AC power. Unlike the traditional 3-phase AC source, it includes low power rating models at very low cost. Users can program voltage and frequency, measure the critical characteristics of the output on its LCD display. It delivers the right solution to simulate all kinds of input condition of UUT to be utilized in R&D and QA. It is also suitable for commercial applications from laboratory testing to mass productions.

The 61700 series AC Source supplies the output voltage from 0 to 300VAC and it can be set individually for each phase. Users also can set the phase angle from 0° to 360°. These kinds of function make the 61700 series can simulate unbalance 3-phase power. Because of the wide output frequency from 15 to 1200Hz, it is suitable for avionics and military application. The AC+DC mode extends the output function to simulate abnormal situation when power line contains DC offset.

The 61700 series uses the state-of-the-art PWM technology and power factor correction circuit. So it is capable to generate very clean AC output with typical distortion less than 0.3%,

and it can yield higher efficiency and deliver more output power.


By using advanced DSP technology, the 61700 series offers precision and high speed measurements such as RMS voltage, RMS current, true power, power factor, and current crest factor, etc.

The 61700 series offers an optional function to output transient voltage. The function includes LIST, PULSE, STEP and INTERHARMONICS mode. Users can easily program variant waveform for immunity test. The 61700 series can also be controlled by a powerful and user-friendly softpanel through GPIB or RS-232 interface. Besides that, the softpanel includes a waveform editor that can edit up to 40th order harmonic components. By this way, the 61700 series get the ability to output distorted waveform as users like.

The self-diagnosis routine and protections against over power, over current, over voltage, over temperature and fan fail, the 61700 series ensure the quality and reliability for even the most demanding engineering testing and production line application.





By using advanced DSP technology and building in a 16-bit precision measurement circuit, the 61700 series AC source offers precision and high speed measurements. Such as RMS voltage, RMS current, true power, power factor, and current crest factor, VA (apparent power) and VAR (reactive power). Users can use rotary knob to change the measurement items shown on LCD display. They also can change page to see more measurement items.

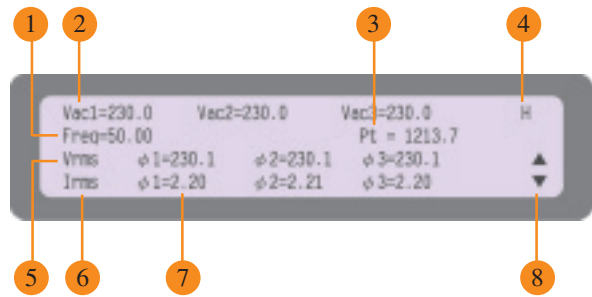

- |                        |                           |
|------------------------|---------------------------|
| 1. Frequency setting   | 5. Voltage r.m.s. measure |
| 2. Voltage setting     | 6. Current r.m.s. measure |
| 3. Total power measure | 7. Current measure data   |
| 4. High voltage range  | 8. Up or down page        |

### PANEL DESCRIPTION

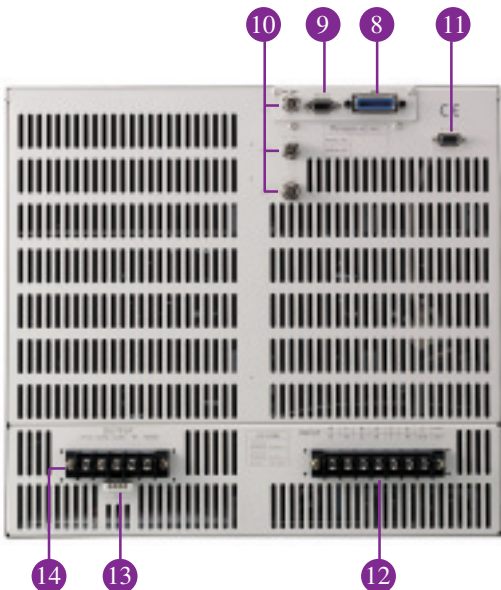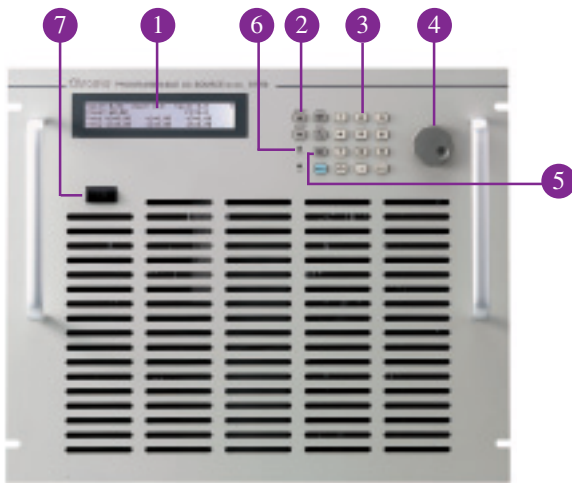


1. **LCD Display**  
LCD display shows the setup, operating status and readings
2. **Page Up/Down Key**  
Facilitate parameter data editing
3. **Numeric Key**  
Data entry of test parameters
4. **Rotary Knob**  
Program analog of setting the voltage, frequency and parameter setting
5. **Output Enable Key**  
To enable or disable output
6. **Output Indicator**  
Light on when output is enable
7. **Power Switch**
8. **GPIB Interface**
9. **RS-232C Interface**
10. **External V Reference (Reserved)**  
External programming voltage input
11. **System Interface**  
TTL signals for system status
12. **Input Terminal**  
3Ø Y and Δ connecting are suitable
13. **Remote Sense Terminal**  
Use to compensate the line drop between source and testing point
14. **Output Terminal**  
Connect output cable to the UUT

## APPLICATIONS

### EASY-USE SOFTPANEL



61700 series Softpanel : Main page

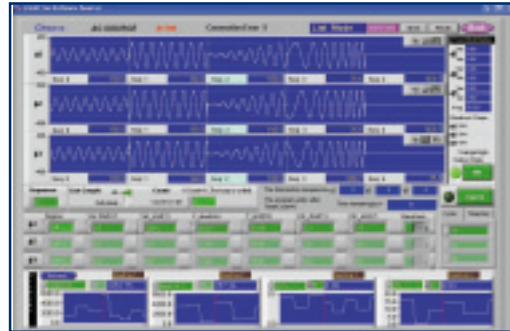

Optional Function : LIST Mode Voltage Transient Output

### AEROSPACE TESTING



MIL-STD-704E Testing



RTCA DO-160D Testing



## ORDERING INFORMATION

- 61701 : Programmable AC Source 0~300V, 15~1.2KHz, 3Ø 1500VA
- 61702 : Programmable AC Source 0~300V, 15~1.2KHz, 3Ø 3000VA
- 61703 : Programmable AC Source 0~300V, 15~1.2KHz, 3Ø 4500VA
- 61704 : Programmable AC Source 0~300V, 15~1.2KHz, 3Ø 6000VA
- 61705 : Programmable AC Source 0~300V, 15~1.2KHz, 3Ø 12000VA
- A615001 : Remote Interface Board for 61500/61600/61700 Series (RS-232 Interface, GPIB Interface)
- A617001 : Softpanel for Model 61700 Series
- A600009 : GPIB Cable (200cm)
- A600010 : GPIB Cable (60cm)

(\*Option for transient voltage output function, including LIST, PULSE, STEP and INTERHARMONICS mode.)

## SPECIFICATIONS

Model	61701	61702	61703	61704	61705
<b>AC Output Rating</b>					
Max. Power	1500VA	3000 VA	4500 VA	6000 VA	12000 VA
Per Phase	500VA	1000 VA	1500 VA	2000 VA	4000 VA
<b>Voltage</b>					
Range	150V/ 300V	150V/ 300V	150V/ 300V	150V/ 300V	150V/ 300V
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V	0.1V	0.1V	0.1V
Distortion *1	0.3% @50/60Hz 1.5% 15~1.2K Hz	0.3% @50/60Hz 1.5% 15~1.2K Hz	0.3% @50/60Hz 1.5% 15~1.2K Hz	0.3% @50/60Hz 1.5% 15~1.2K Hz	0.3% @50/60Hz 1.5% 15~1.2K Hz
Line Regulation *2	0.1%	0.1%	0.1%	0.1%	0.1%
Load Regulation	0.2%	0.2%	0.2%	0.2%	0.2%
Temp. Coefficient	0.02% per degree from 25°C				
<b>Maximum Current (per phase)</b>					
R.m.s.	4A/2A	8A/4A	12A/6A	16A/8A	32A/16A
Peak	24A/12A	48A/24A	72A/36A	96A/48A	192A/96A
<b>Frequency</b>					
Range	DC, 15~1.2K Hz	DC, 15~1.2K Hz	DC, 15~1.2K Hz	DC, 15~1.2K Hz	DC, 15~1.2K Hz
Accuracy	0.15%	0.15%	0.15%	0.15%	0.15%
<b>Phase Angle</b>					
Range	0~360°	0~360°	0~360°	0~360°	0~360°
Resolution	0.3°	0.3°	0.3°	0.3°	0.3°
Accuracy	< 0.8° @50/60Hz	< 0.8° @50/60Hz	< 0.8° @50/60Hz	< 0.8° @50/60Hz	< 0.8° @50/60Hz
<b>DC Output Rating (per phase)</b>					
Power	250W	500W	750W	1000W	2000W
Voltage	212V/424V	212V/424V	212V/424V	212V/424V	212V/424V
Current	2A/1A	4A/2A	6A/3A	8A/4A	16A/8A
<b>Input 3-Phase Power (per phase)</b>					
Voltage Range	90~250V	90~250V	190~250V	190~250V	190~250V
Frequency Range	47~63Hz	47~63Hz	47~63Hz	47~63Hz	47~63Hz
Current	8A Max.	16A Max.	10A Max.	14A Max.	28A Max.
Power Factor *3	0.97 Min.	0.98 Min.	0.98 Min.	0.98 Min.	0.98 Min.
<b>Measurement</b>					
<b>Voltage (line-neutral)</b>					
Range	150V/300V	150V/300V	150V/300V	150V/300V	150V/300V
Accuracy	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.	0.2%+0.2%F.S.
Resolution	0.1V	0.1V	0.1V	0.1V	0.1V
<b>Current (per phase)</b>					
Range (peak)	24A	48A	72A	96A	192A
Accuracy (r.m.s.)	0.4%+0.3%F.S.	0.4%+0.3%F.S.	0.4%+0.3%F.S.	0.4%+0.3%F.S.	0.4%+0.3%F.S.
Accuracy (peak)	0.4%+0.6%F.S.	0.4%+0.6%F.S.	0.4%+0.6%F.S.	0.4%+0.6%F.S.	0.4%+0.6%F.S.
Resolution	0.01A	0.01A	0.01A	0.01A	0.01A
<b>Power (per phase)</b>					
Accuracy	0.4%+0.4% F.S.	0.4%+0.4% F.S.	0.4%+0.4% F.S.	0.4%+0.4% F.S.	0.4%+0.4% F.S.
Resolution	0.1W	0.1W	0.1W	0.1W	0.1W
<b>Others</b>					
Efficiency *4	68 %	77 %	81 %	82%	82%
Size (WxHxD)	483x399x600mm	483x399x600mm	483x399x600mm	483x399x600mm	546x985x700 mm
Weight	74Kg	74Kg	75Kg	75Kg	150Kg
Protection	UVP, OCP, OPP, OTP, FAN				
<b>Temperature Range</b>					
Operation	0°C~40°C				
Storage	-40°C~85°C				
Humidity	30 %~90 %				
Safety & EMC	CE				

All specifications are subject to change without notice.

### Remarks

\*1 : Maximum distortion is tested on output 125VAC (150V RANGE) and 250VAC (300V RANGE) with maximum current to linear load.

\*2 : Load regulation is tested with sinewave and remote sense.

\*3 : Input power factor is tested on input 220V, full load condition.

\*4 : Efficiency is tested on input voltage 110V for 61701 and 61702, 220V for 61703, 61704 and 61705.

Developed and Manufactured by :

### CHROMA ATE INC.

致茂電子股份有限公司  
HEADQUARTERS  
66, Hwa-Ya 1st Rd., Hwa-Ya  
Technical Park, Kuei-Shan Hsiang,  
Taoyuan Hsien 333, Taiwan  
Tel: +886-3-327-9999  
Fax: +886-3-327-8898  
http://www.chromaate.com  
E-mail: chroma@chroma.com.tw

U.S.A.  
CHROMA ATE INC. (U.S.A.)  
7 Chrysler Irvine, CA 92618  
Tel: +1-949-421-0355  
Fax: +1-949-421-0353  
Toll Free: +1-800-478-2026

EUROPE  
CHROMA ATE EUROPE B.V.  
Max Planckstraat 4, 6716 BE  
Ede, The Netherlands  
Tel: +31-318-648282  
Fax: +31-318-648288

CHINA  
CHROMA ELECTRONICS  
(SHENZHEN) CO., LTD.  
8F, No.4, Nanyou Tian An  
Industrial Estate, Shenzhen,  
China P.c: 518054  
Tel: +86-755-2664-4598  
Fax: +86-755-2641-9620

Distributed by:

Worldwide Distribution and Service Network

61700-200505-1000